

4

3

2

1

PIN NUMBER	DESCRIPTION
1	CONNECTED TO HOLE A
2	CONNECTED TO HOLE B
3	CONNECTED TO HOLE A
4	CONNECTED TO HOLE B
5	THERMISTOR RELATIVE TO RETURN
6	NOT CONNECTED
7	CHANNEL B OUTPUT OF OPTICAL ENCODER
8	CHANNEL A OUTPUT OF OPTICAL ENCODER
9	RETURN FOR OPTICAL ENCODER AND THERMISTOR
10	+3.3 TO +5 VDC POWER FOR OPTICAL ENCODER

REVISIONS					
ZONE	LETTER	DESCRIPTION	DATE	CHECKED	APPROVED

D

D

C


C

B

B

A

A

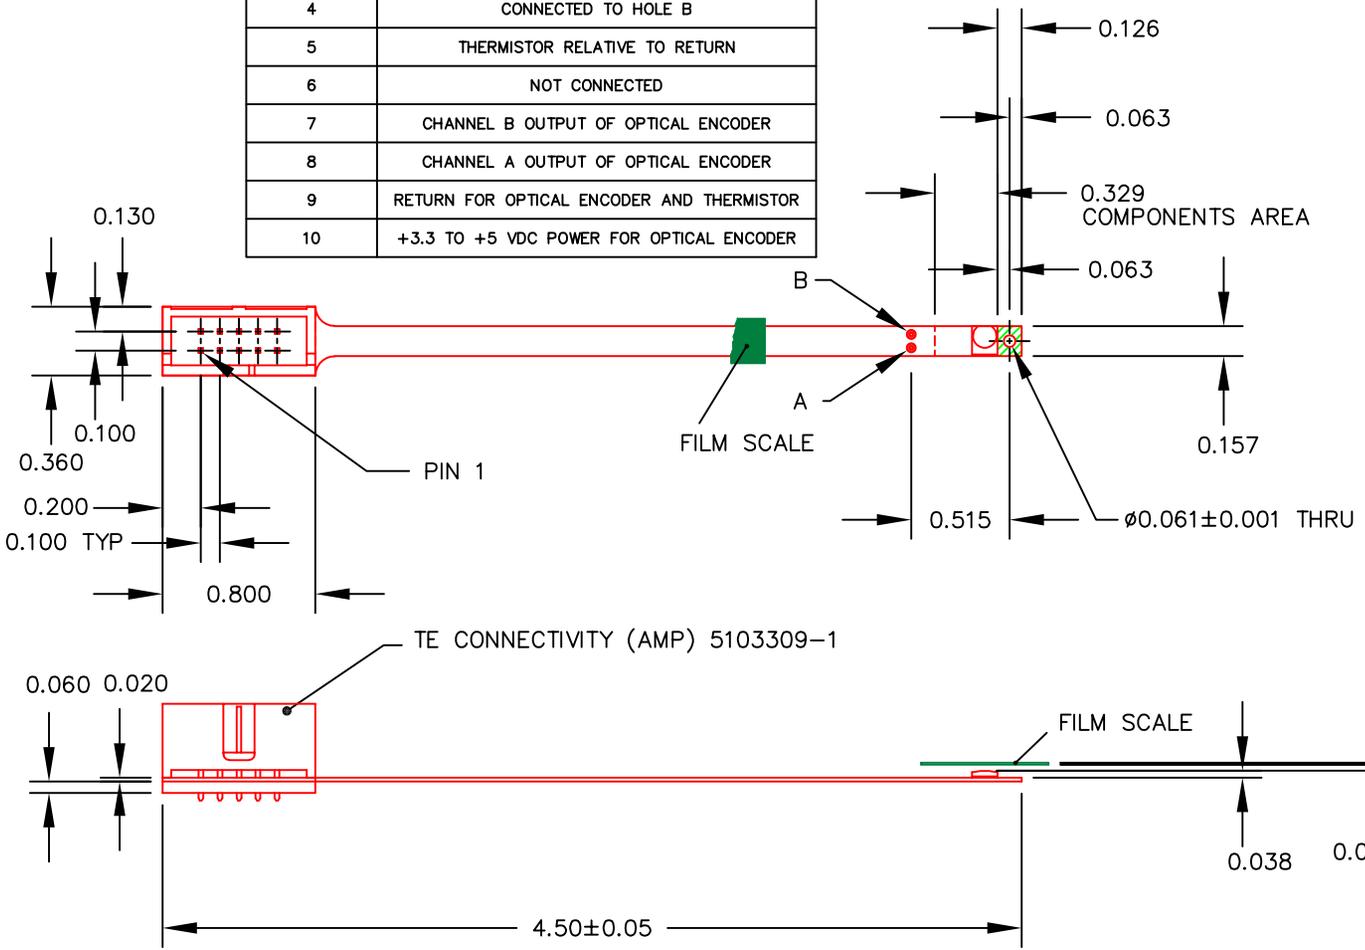

THIS DOCUMENT, WHETHER OR NOT MARKED AS PROPRIETARY, IS CONSIDERED CONFIDENTIAL AND SHALL REMAIN THE PROPERTY OF MOTICONT AND SHALL BE RETURNED TO MOTICONT UPON REQUEST WITH ALL COPIES MADE THEREOF. THIS DOCUMENT CANNOT BE UTILIZED IN THE MANUFACTURE OF ARTICLES SOLD OR OFFERED OR DISCLOSED TO ANYONE AND NO USE OF IT CAN BE MADE UNLESS EXPRESSLY AUTHORIZED BY AND UNDER THE DIRECTION OF MOTICONT. POSSESSION OF THIS DOCUMENT IS ACCEPTED SUBJECT TO THE FOREGOING.

NOTES :  
UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES (mm)	
TOLERANCES ON:	
DECIMALS	FRACTIONS ANGLES
.XXX .XX	± 1/125 ± 1/2'
± .005 ± .01	
UNLESS OTHERWISE SPECIFIED	
USED ON	NEXT ASSY
APPLICATION	

MATERIAL	CONTRACT
FINISH	DRN
	CHKD
	APPVD
	APPVD

<b>MOTICONT</b>			
ENCODER FLEX - 1.25UM			
SIZE	CODE	DWG. NO.	REV.
A		OEM-00125-02	1
SCALE: 1 / 1		SHEET 1 OF 1	